

1 / 8

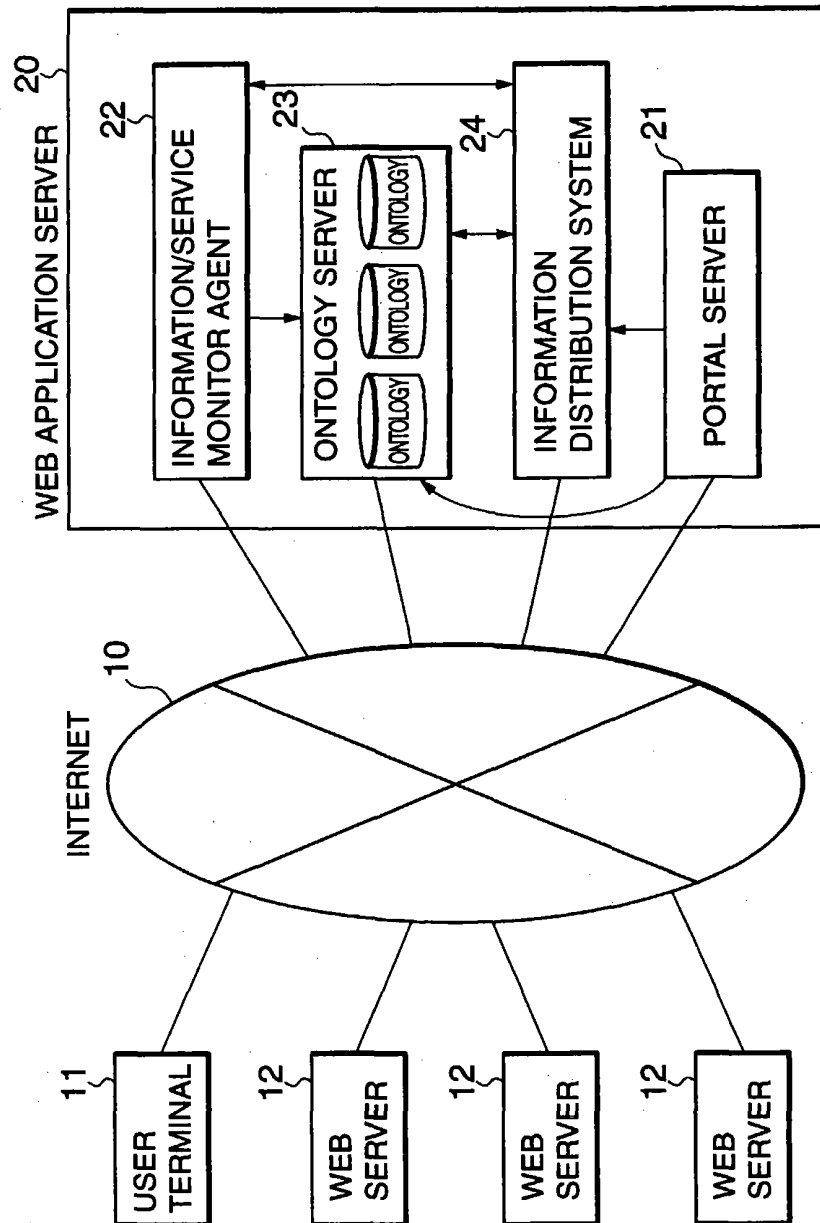


FIG.1



3/8

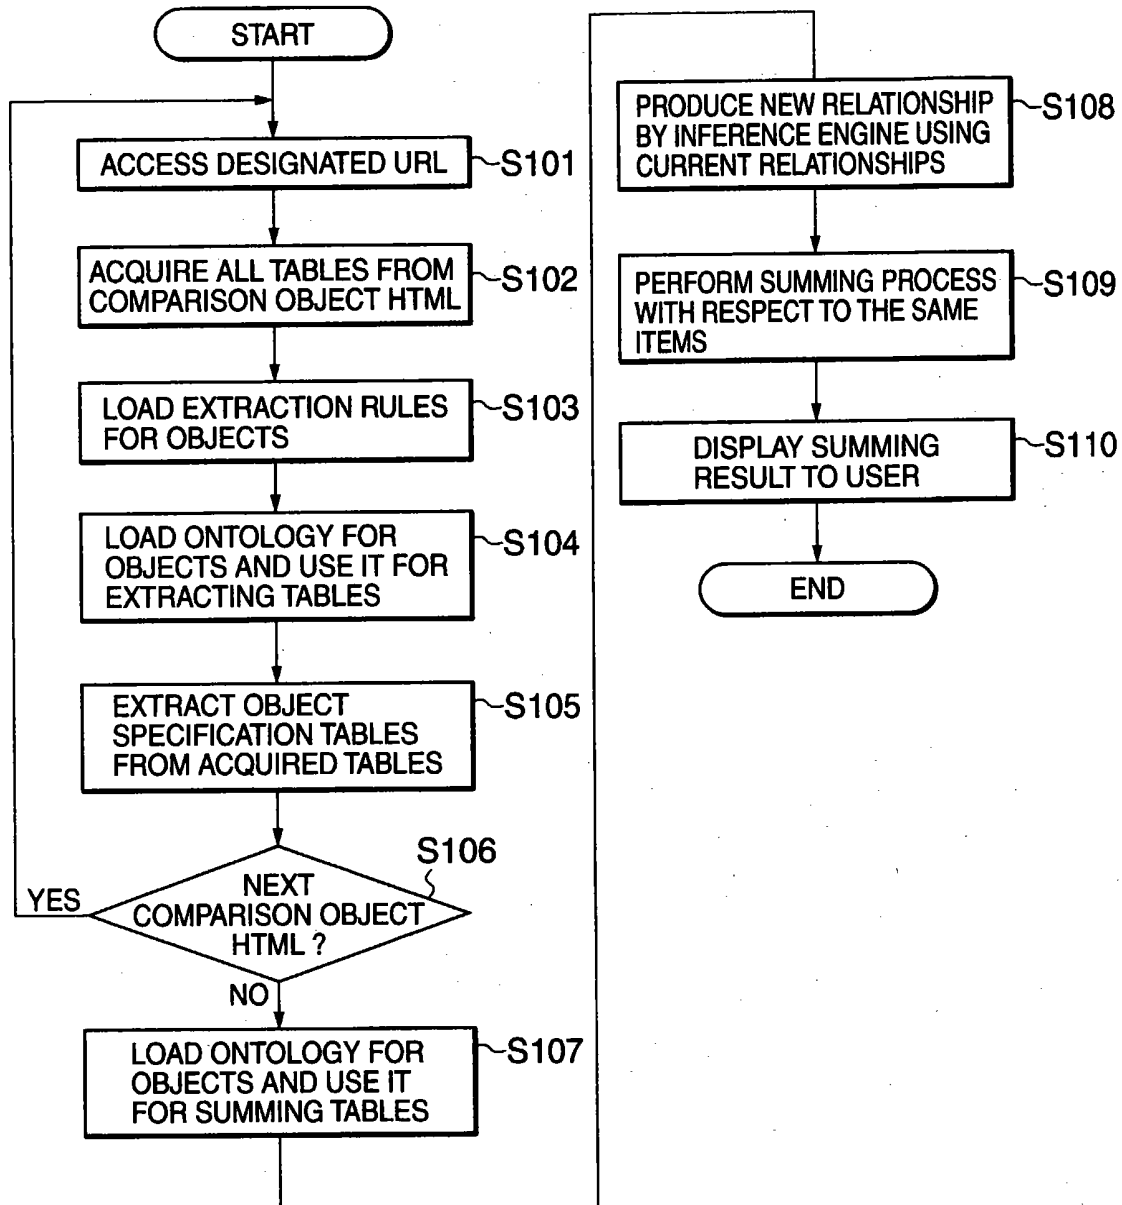


FIG.3

4 / 8

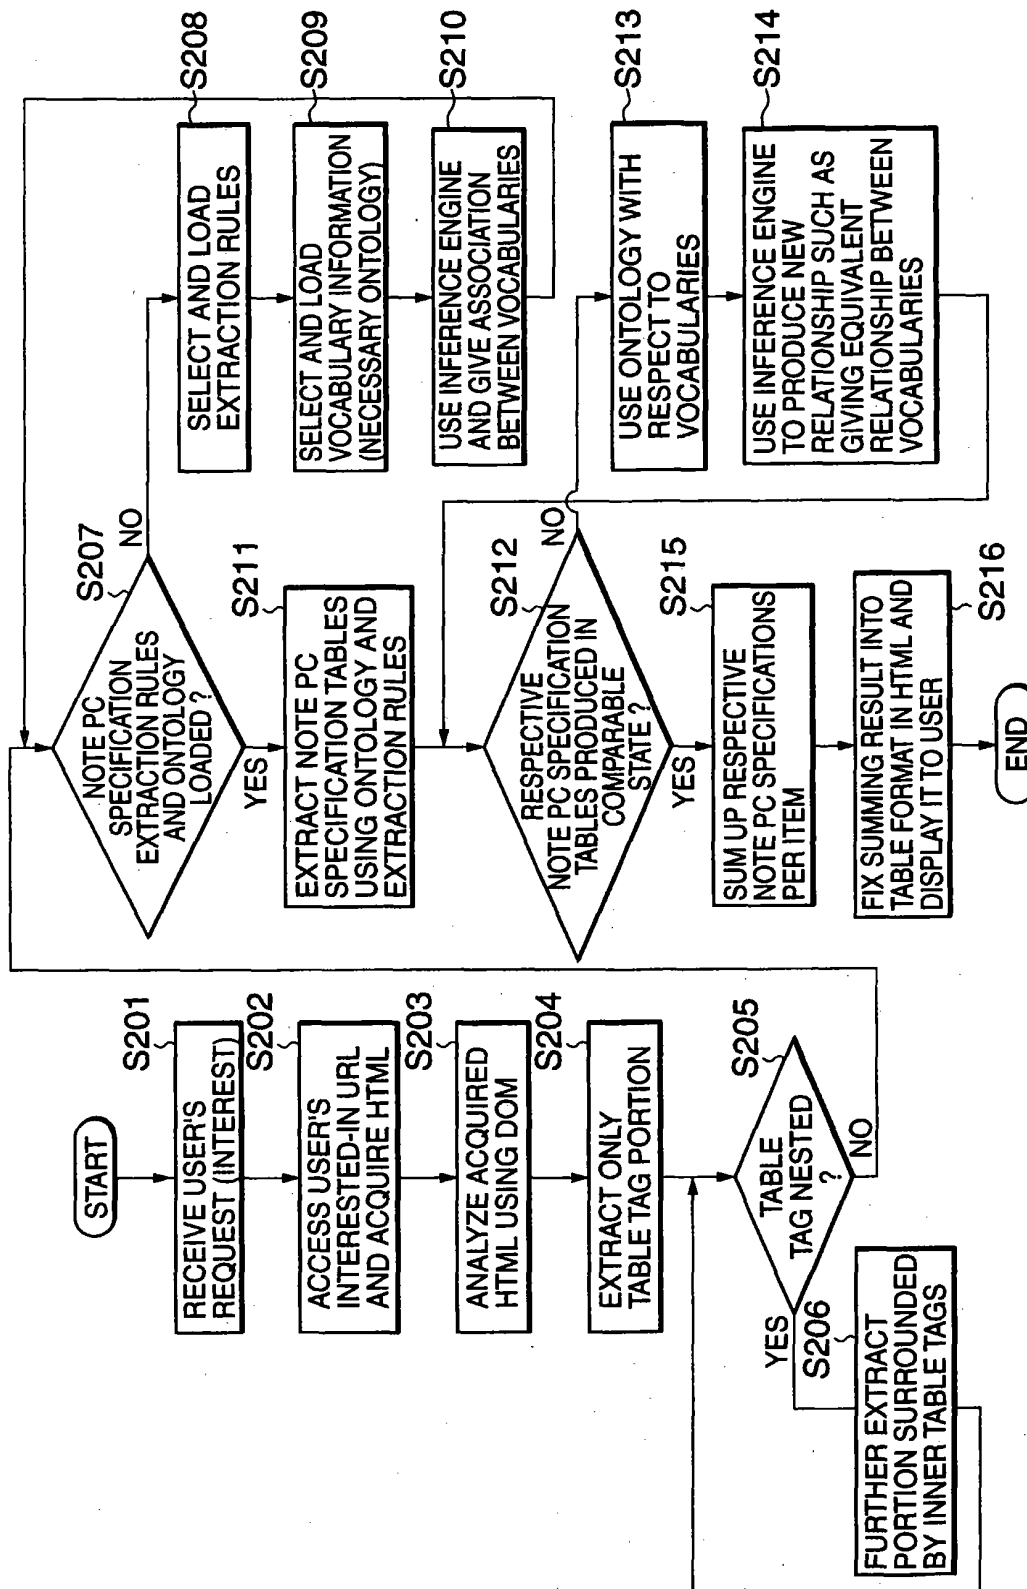


FIG.4

5 / 8

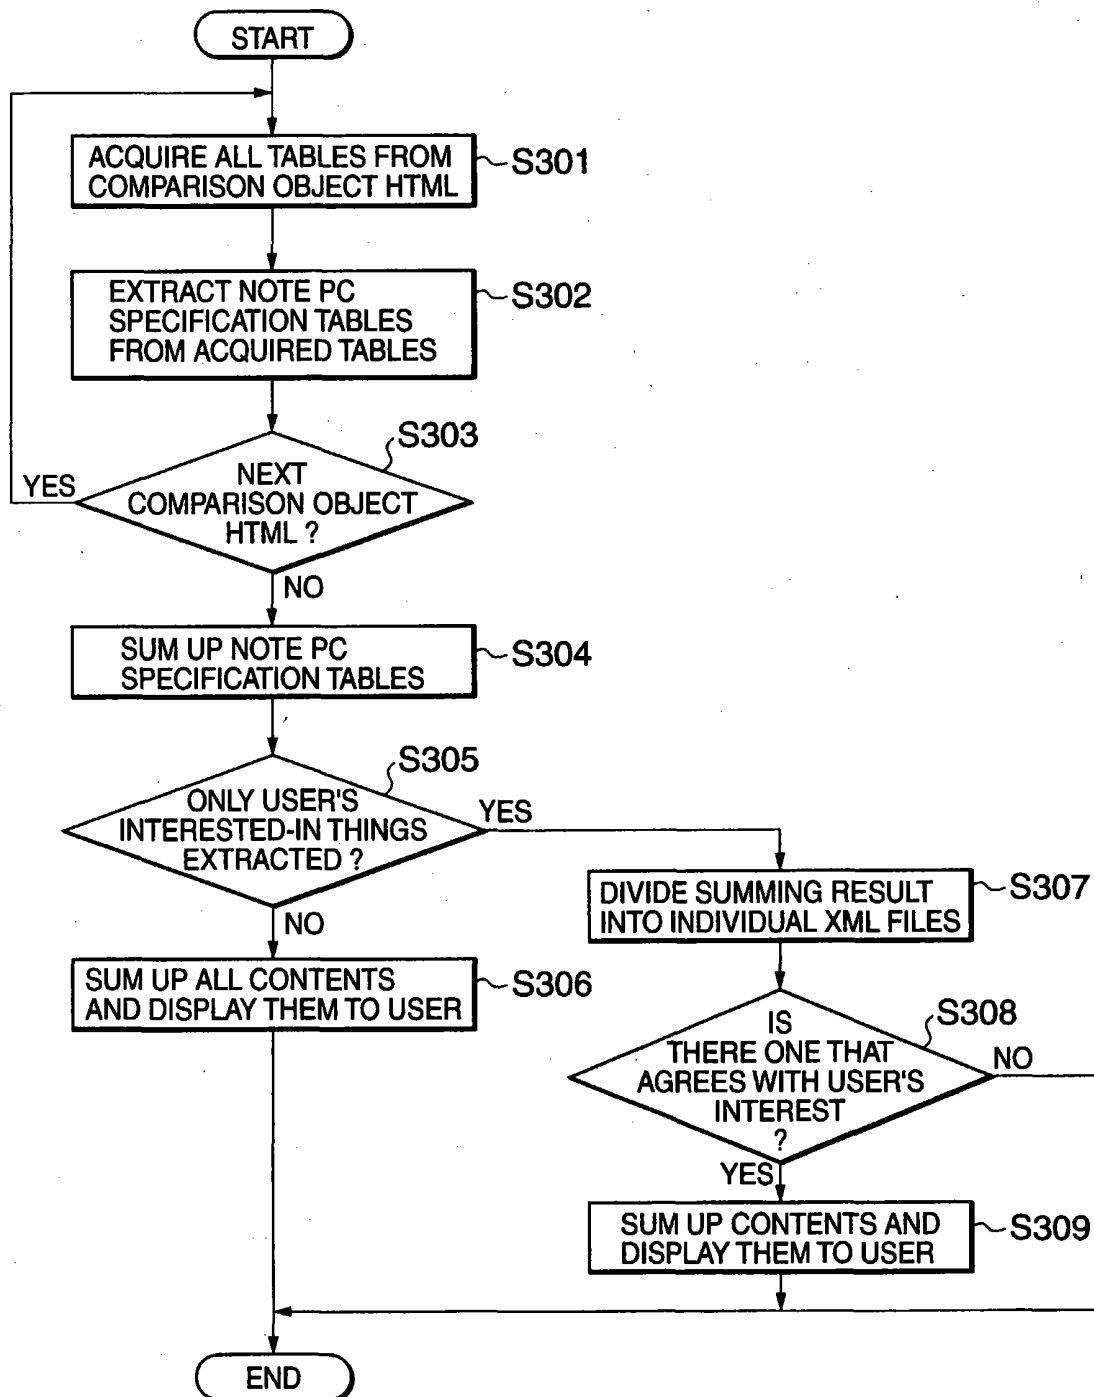


FIG.5

6 / 8

ORDER NO.	M2638 J/F	M2699 J/F	M7802 J/F
PROCESSOR	500MHz PPP PC G3	600MHz PPP PC G3	600MHz PPP PC G3
SECONDARY CACHE	256KB/500MHz	256KB/600MHz	256KB/600MHz
MEMORY (PC100 SDRAM)	128MB (EXTENSIBLE UP TO 640MB)	128MB (EXTENSIBLE UP TO 640MB)	256MB (EXTENSIBLE UP TO 640MB)
SYSTEM BUS	66MHz	100MHz	100MHz
HARD DISK DRIVE	ABOUT 15GB Ultra ATA	ABOUT 20GB Ultra ATA	ABOUT 20GB Ultra ATA
OPTICAL DRIVE	CD-ROM	DVD ROM/CD-RW COMPONENT	DVD ROM/CD-RW COMPONENT
DISPLAY	12.1 INCH (DIAGONAL) TFT XGA	12.1 INCH (DIAGONAL) TFT XGA	14.1 INCH (DIAGONAL) TFT XGA
FIRE WIRE (IEEE 1394)	400Mbps PORT x 1		
USB	2 (EACH 12Mbps)		
GRAPHICS SUPPORT	ATI RAGE MOBILITY 128(BMB SDRAM)		
VGA AND COMPOSITE VIDEO OUTPUT	VGA VIDEO OUTPUT PORT (EXTERNAL DISPLAY/FOR VIDEO MIRRORING WITH RGB PROJECTOR)		
COMPOSITE VIDEO OUTPUT	COMPOSITE VIDEO OUTPUT (OUTPUT TO TELEVISION/AV PROJECTOR VIA AV PORT. AV CABLE OF COMPANY B SOLD SEPARATELY IS NECESSARY)		

FIG.6

7/8

NOTE PC 23				
MODEL TYPE	2647-6RJ	2647-2RJ	2647-9JJ	2647-5JJ
BODY SIZE	304 x 250 x 33.1 mm		307 x 250 x 34 mm	
WEIGHT (INCLUDING BATTERY PACK AND BAY DEVICE)	2.3kg		2.5kg	
CPU	MOBILE CPU III1GHz-M		MOBILE CPU III1GHz-M	
SECONDARY CACHE	512KB (INCLUDED IN CPU)			
CHIPSET	KENNW 30MP			
RAM STANDARD/MAXIMUM	128MB (PC133 SDRAM)/1,024MB			
RAM SLOT (VACANT)	2(1)			
VIDEO CHIP (CAPACITY)	S3 SUPER SAVAGE IXC (AGP 4X)			
	16MB			
DISPLAY (SIZE·DOT·COLOR) ※2	14.1 V-TYPE TFT LIQUID CRYSTAL (1,024 x 768 DOTS, 16,770,000 COLORS)		14.1 V-TYPE TFT LIQUID CRYSTAL (1,400 x 1,050 DOTS, 16,770,000 COLORS)	
UPON EXTERNAL CONNECTION (DOT, COLOR)	1,600 x 1,200 DOTS, 16,770,000 COLORS			
FDD※4	3.5 TYPE (1.44MB/720KB)(TO BE PACKED UPON SHIPPING, TO BE MOUNTED IN ULTRA BAY 2000 UPON USE)			
HDD※5	20GB		48GB	

FIG.7

8 / 8

COMPANY A NOTE PC - SPECIFICATION			COMPANY B PC 23 - PRODUCT SPECIFICATION				
TYPE-MODEL	M2638 J/F	M2699 J/F	M7802 J/F	2647-6RJ	2647-2RJ	2647-9JJ	2647-5JJ
PROCESSOR	500MHz PPP PC G3	600MHz PPP PC G3	600MHz PPP PC G3	MOBILE CPU 1GHz-M	MOBILE CPU 1GHz-M	MOBILE CPU 1.20GHz-M	MOBILE CPU 1.20GHz-M
MEMORY	128MB (EXTENSIBLE UP TO 640MB)	128MB (EXTENSIBLE UP TO 640MB)	256MB (EXTENSIBLE UP TO 640MB)	128MB(PC-133 SDRAM)/1,024MB	128MB(PC-133 SDRAM)/1,024MB	128MB(PC-133 SDRAM)/1,024MB	128MB(PC-133 SDRAM)/1,024MB
DISPLAY	12.1 INCH (DIAGONAL) TFT XGA	12.1 INCH (DIAGONAL) TFT XGA	14.1 INCH (DIAGONAL) TFT XGA	14.1 V-TYPE TFT LIQUID CRYSTAL (1,024 x 768 DOTS, 16,770,000 COLORS)	14.1 V-TYPE TFT LIQUID CRYSTAL (1,024 x 768 DOTS, 16,770,000 COLORS)	14.1 V-TYPE TFT LIQUID CRYSTAL (1,400 x 1,050 DOTS, 16,770,000 COLORS)	14.1 V-TYPE TFT LIQUID CRYSTAL (1,400 x 1,050 DOTS, 16,770,000 COLORS)
HARD DISK DRIVE	COMPANY A ABOUT 15GB Ultra ATA	ABOUT 20GB Ultra ATA	ABOUT 20GB Ultra ATA	20GB	20GB	48GB	48GB
SYSTEM SOFTWARE	COMPANY A OS X version 10.1.2, Mac OS 9.2.2	COMPANY A OS X version 10.1.2, COMPANY A OS 9.2.2	COMPANY A OS X version 10.1.2, COMPANY A OS 9.2.2	XXX PX PROFESSIONAL	XXX 2002 PROFESSIONAL	XXX PX PROFESSIONAL	XXX 2002 PROFESSIONAL

FIG.8